

# Ship Manoeuvring Performance Experiments Using a Free Running Model Ship

**N. Im & J.-H. Seo**

*Mokpo National Maritime University, Mokpo, South Korea*

**ABSTRACT:** In this paper, a 3m-class free running model ship will be introduced with its manoeuvring performance experiments. The results of turning circle test and zig-zag test will be explained. The developed system are equipped with GPS, main control computer, wireless LAN, IMU (Inertial Measurement Unit), self-propulsion propeller and driving rudder. Its motion can be controlled by RC (Radio Control) and wireless LAN from land based center. Automatic navigation is also available by pre-programmed algorithm. The trajectory of navigation can be stored by GPS and it provides us with important data for ship's motion control experiments. The results of manoeuvring performance experiment have shown that the developed free running model ship can be used to verify the test of turning circle and zig-zag. For next step, other experimental researches such as ship collision avoidance system and automatic berthing can be considered in the future.

## 1 INTRODUCTION

Recently many researches on ship automatic navigation system have been carried out. The one of system required for these researches is a free running model ship. A free running model ship has been used in ship model basin area to validate or confirm ship's manoeuvring/motion or resistance performance before the ship's building. When a free running model ship is used in a basin, usually it is known that there are limits of basin size to fully test the ship's performance. Therefore many researches have been carried out outdoor such as pond or river.

When experiment is conducted outdoor using a free running model ship, a lot of equipments are required such as IMU (Inertial Measurement Unit), GPS (Global Position System) and other facilities to get other ship's information. This paper will introduce MMU (Mokpo National Maritime university) free running model ship which can be used for ship's manoeuvring/motion performance tests. The system is equipped with GPS and AIS to get ship's real time position and other ship's information. Main purpose of this model ship is to carry out ship's intelligent navigation test where the ship navigate recommend sea route or ship avoid other ship in the sea without human control automatically. The research in this paper was carried out as the first step of these researches. The structural and functional concept of the free running model will be introduced. We carried out basic ship's performance tests such as tun-

ing circle and zig-zag test as a first step of ship intelligent navigation tests. We found good performance in the model ship and that the model can be utilized in ship intelligent navigation tests in the future.

## 2 THE STRUCTURE OF A FREE RUNNING MODEL SHIP

The MMU free running model ship consists of following equipments.

- Main electric system
- Device control system
- Signal measurement system
- Communication system
- Model ship

### 2.1 Main Electric System

A free running model ship usually requires high capacity of power because it is operated open waters with wind disturbances. The electric system of MMU model supplies its electricity to servo motors and computer power and communication system. Two servo motors are equipped in the model ship, one (700W) for propeller and the other (100W) for rudder operation. In operation situations, the servo motors always controlled, so capacity of battery is important to keep the model powered for long time. Two of battery are installed with a 12V deep cycle method and 100ah class of parallel circuits. Output

power from batteries is sent to a DC/AC inverter and converted into 220V single-phase current for each electricity equipments. A current transformers or SMPS (Switching Mode Power Supply) of 24V or 12V often is used for small capacities equipments.



Figure 1. Battery and converter

## 2.2 Device Control System

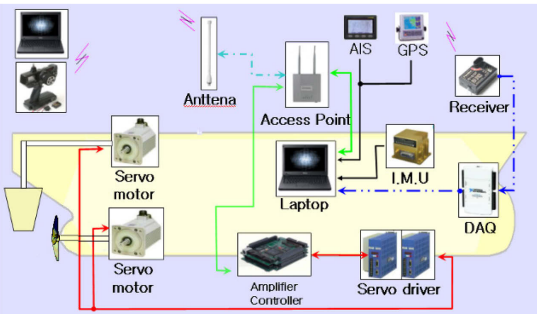


Figure 2. System flow in a model ship

Control device system consists of access point (IEEE.802 11g), laptop computer, PMAC, servo driver and wireless control system. The following explains more details

- Laptop computer  
It controls the total system of model ship. Its signal translated into each equipment with TCP/IP signal through a network adopter
- PMAC  
When it receives TCP/IP signal, the output of range 0-10V is produced and sent to each servo driver such as rudder and propeller gears.
- Servo driver  
It controls the rudder and propeller motors with signals from PMAC.
- Radio control Receiver  
The receiver get signals from radio control transmitter to control rudder angle and propeller revolution. The translated signal is sent to laptop computer by way of NI USB-DAQ.

## 2.3 Data Acquisition System

The signals in a free running model can be into two types roughly. The first is signal for a ship motion control part and the second is for motion measurements such as 6 DOF (Degree Of Freedom). All signals from ship's motion and control part is translated

into laptop computer in the model where each signal are stored or re-translated according to their purpose. The following explain measured signal at each equipment.



Figure 2. Data acquisition system

- PMAC  
Each phase generated in encoders of servo motor is input into PMAC via servo driver. The input phases are converted into meaningful data for rudder location and propeller revolution. The data also translated into laptop computer via TCP/IP to be stored as data log or monitoring purpose.
- NI-USB-DAQ  
The data translated into radio control receiver is converted to PWM (pulse Width Modulation) signal. The NI-USB-DAQ translate the signal of PWM into laptop computer in model ship via USB port.
- 6 Axis IMU (Inertial Measurement Unit)  
The signal data from IMU are translated into computer by serial communication. They are used for ship's motion logging and monitoring.
- GPS (Global Position System)  
The signal data from GPS also are translated into computer by serial communication. They are used for logging and monitoring of ship's trajectory.
- AIS (Automatic Identification System)  
It is equipped to obtain other ship's information such as ship's position, heading angle and speed. Its signal also translated as serial data into computer. This system can be used as one of intelligent navigation system. When a model ship avoids collision situations, the data from AIS is very essential to calculate the risk of collision between two ships.

## 2.4 Communication System

A communication system of the model ship can be divided into three types of analogue signal, TCP/IP and RS-232. The following are explanations of equipments and protocol.

- Digital and analogue signal  
Encoders in servo motor produce several pulse. Control signal for servo motor ranges from 0V to 10V. The NI-USB-DAQ adopted in the model

ship has spare channel for signal I/O , therefore additional hardware installation will be convenient such as wind and current meters and additional propulsion equipment.

– TCP/IP

The access point (IEEE. 802.11g), a close range wireless communication protocol, enable users to transmit data with 54Mbps. The communication between the laptop computer in the model ship and shore control center is possible by TCP/IP. The signal to/from PMAC is translated via access point with form of TCP/IP to control ship's operation.

– RS 232

Several equipments such as IMU, AIS and GPS use serial data transmission, RS 232. All data from these equipments are stored in laptop computer system for logging and monitoring of the ship's situations.

– PWM (Pulse Width Modulation)

Emergency situations such as model ship power failure or collisions require prompt and direct control. Radio control transmitter- receiver deals their signal with PWM method. When NI-USB-DAQ receives pulse from radio control receiver and decides what kinds of control should be done using the pulse's time from raising edge to falling edge.

### 2.5 Model Ship

The model ship has 1/100 of model scale. Waterproof was considered in every hatch to prevent capsizing of the model. The table 1 and 2 show the principal of model ship. The figure 2 explains the model ship.

Table 1. Principal particulars of model ship

	Ship	Model
Scale ratio	1	100
Design speed	15.5(knots)	0.7973(m)
L.B.P(m)	320	3.2
L.W.L(m)	325.5	3.255
B(m)	58.0	0.58
Depth(m)	30.0	0.3
Draft(m)	20.8	0.2080
$m^2$ WSA()	27320.0	2.7320
$m^3$ Volume()	312737.5	0.3127
$C_D$	0.8101	0.8101
$H_a$	0.142	0.142

Table 2 Principal particulars of model ship

Type	Rudder Horn	Propeller Type	FP
S of rudder( $m^2$ )	273.3	No. of blades	4
Lat area( $m^2$ )	136.7	D(m)	9,86
Turn rate (deg/sec)	2.34	P/D(0.7R)	0.721
		Ae/A0	0.425
		Rotation	C.W
		hub ratio	0.155



Figure 3. The picture of the model ship

## 3 THE MODEL OPERATION

The operating system for the model ship can be divided into two system of software operating system and hardware operating system.

### 3.1 Operating System of Software

Table 3 indicates software operating system adopted for the model ship. As shown this table, Window XP and LabView are used for OS and computer program language.

Table 3 Operating System of Software

Computer OS	Windows XP
Computer Language	LabVIEW 8.5
device driver	PMAC
	NI-DAQ

### 3.2 Operating System of hardware

Critical control is done by inner computer on board which is controlled from shore computer with wireless network communication. A priority of control is set to radio control receiver-transmitter in specified frequency to cope with emergency situations. This enables users to take appropriate and prompt actions. In case of radio control receiver failure or networks signal errors, the inner computer of model ship is designed to run programmed sequence or process. The figure 4 indicates the priority of operation system. When local control mode is selected, model ship can be controlled by shore or inner laptop computer by manual mode. If local control mode is cancelled, radio control is searched at first. When radio control signal is not found, automatic navigation control mode is activated

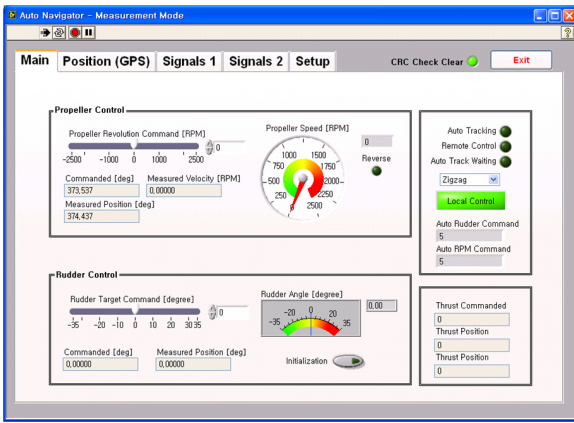


Figure 4. Main screen of operating program

Users can use additional safety measurement, the function of “fail safe” where radio control system can be kept specified conditions or stopped if radio transmitter-receiver failed to get signals or the level of power in battery is so low. This enables the user to cope with emergency situations such as power failure in model ship or critical collision situation.

All data of model ship can be obtained from USB ports. Additional equipment’s installation also is possible through spare ports of USB.

## 4 EXPERIMENTS

In this research, two kinds of experiments are carried out in the costal sea and in a towing tank. Zig-zag test and turning test were performed. These tests are known as very essential and important method to evaluate a ship’s manoeuvring performances.

### 4.1 Zig-zag test

Zig-zag test of 10-10degree and 20-20degree were performed. The figure 5 shows the results of 10-10zig-zag test carried out in towing tank. The figure 6 shows the results of 20-20 zig-zag test carried out in the costal sea side. As shown in these figures, it is found that the model ship well perform zig-zag test without any errors and the data of ship’s heading and rudder angle also are very clear.

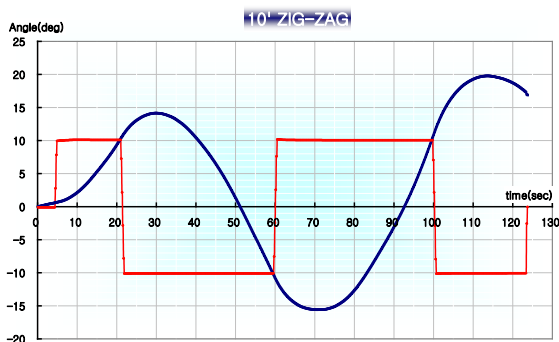


Figure 5. 10-10 zig-zag test in towing tank

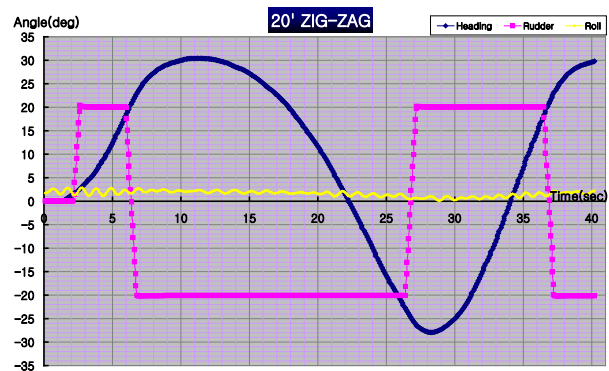


Figure 6. 20-20 zig-zag test in the sea

Figure 7 shows the ship’s trajectories obtained by GPS during ship’s zig-zag test.

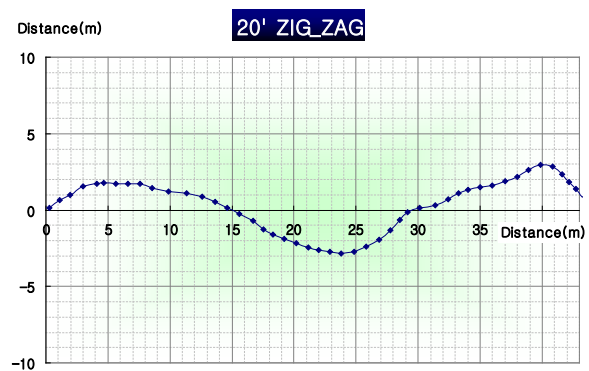


Figure 7. Ship’s trajectories in 20-20 zig-zag test

### 4.2 Turning Circle Test

Ship’s turning test also was carried out. A turning circle tests usually to be performed to both starboard and port with 35 degree rudder angle. The rudder angle is executed following a steady approach with zero yaw rate. Figure 8 and 9 show the results of turning test. As shown in these figure, the trajectories of the model and ship’s heading and rudder angle are clearly obtained to evaluate ship’s manoeuvring performances. The diameters of tactical and advance are found around 7-8 meters. This experiment was performed in open sea. Environmental disturbances such as wind and current effects are included into the results of the experiment.

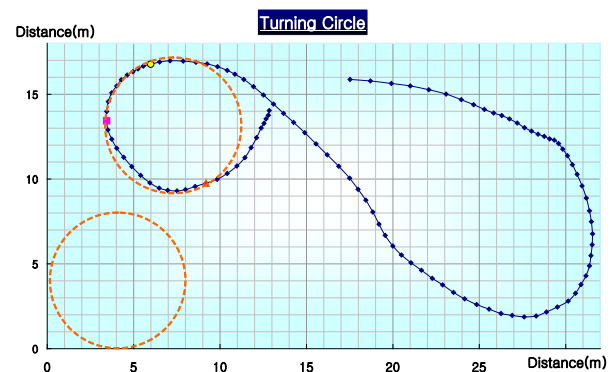


Figure 8. Ship’s trajectories in turning test

## 5 CONCLUSIONS

The main points of research can be summarized as followings.

- The main structure and concept of MMU free running model ship were introduced.
- Zig-zag tests and turning tests were performed to evaluate the model ship's essential usefulness.
- It was found that the model ship's software and hardware system were enough to be used further ship's control research in the future such as ship's intelligent control fields.

## PREFERENCES

- SIMMAN(2008), Geomey of KVLCC1, <http://www.siman2008.KVLCC>
- H Shin , "Crabbing Test of a 3m Ferry Model", Journal of the society of Naval Architects of Korea, Vol 41. No.1 pp 40-46
- H Shin, 2m Class free model ship, Journal of the society of Naval Architects of Korea, Vol 45. No.3 pp 247-257
- H Yoon, Development of Free running model ship for evaluation of the performance of anti-rolling devices. Journal of Korean navigation and port, Vol 28. No.2 pp 33-39

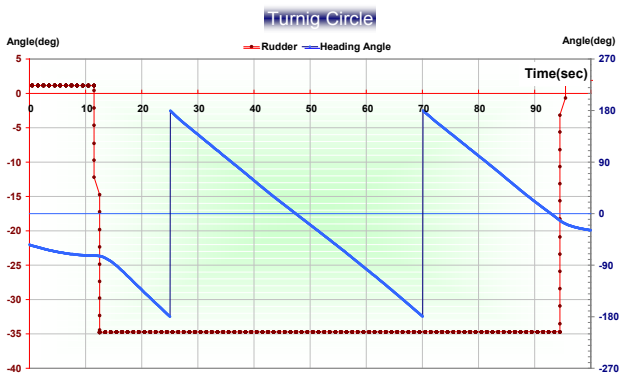


Figure 9. Ship's data in turning test



Figure 10. Zig-zag test in towing tank